Goodlettsville

APPLICATION FOR POOL PERMIT Department of Codes and Building Safety (Application must be complete prior to processing)

Job Address:		
	PROPERTY OWNER	INFORMATION .
Property Owner	Mail Addr	ess
Zip Code:		
	CONTRACTOR INF	ORMATION
Contractor	Mailing Address	City:
Zin Code Contra	actor Contact Phone #	TN State License No.
Permit Bond #:	Effective Date:	Bond Amount:
	Above Ground Pool	
Cost Est	imate of total project:	
Applicant-	Please read below and	attach required documentation
Sketch of pool location	showing:	
☐ Distance to pro	perty lines (minimum 5 feet)	
☐ Sketch must sh	now location of pool barrier fer	ice, gates, all access points to pool.
☐ Show type of lo	ocking devices on gates as we	li as door alarms that comply with UL 2017.
☐ Copy of Electr	ical Permit if new wiring is t	o be installed. (Separate Electrical Permit Required)
☐ Pool heater (Me		(Electrical Permit for electrical supply)
	<u>Contract</u> ensation ☐ Permit Bond	☐ TN State Contractors License
☐ Workers Comp	_	
work is suspended or abandoned. I hereby certify that I have read	for a period of 6 months any time and examined this application an af work will be compiled with	nstruction is not commenced within 6 months, or if construction or
	,	Application Accepted by:
Signature of Contractor	Date	Plans Checked By:
Signature of owner if owner bui	lder Date	Approved For Issuance By
_	*****	Pool Permit #
Gas /Mechanical fee \$		Map
		Parcel
		Lot
		Zoning

County_____



Notice to Property Owners concerning new pool installations

And Final Inspection

The following items are required safety items for all pools that hold over 24" of water. Please verify the below listed items are in place prior to scheduling a final pool inspection to avoid reinspection fees.

In-ground pools

- 1. In ground pools require either a powered safety cover or a barrier completely around the poolit must be a minimum of 48" high.
 - 2. All gates must open out (away from the pool) and be self-closing. (See note below for gate construction.)
- 3. If the a wall of the residence is used as part of the barrier, and you can walk out to the pool without passing through a code compliant gate ALL DOORS that lead to the pool area must have UL listed pool door alarms mounted at 54" above the floor.
- 4. The door alarms must meet the requirements of UL 2017 (A home security system door beep, does not meet this requirement).
- 5. The pool alarm must be in place- (floating alarm).
- **6.** Final inspection from the electrical inspector concerning pump and lighting wiring must be completed. (Extension cords are not allowed).

Above ground pools

- ☐ If the side of the pool is 48" high all the way around, (measured 3' out from the side of the pool-the barrier requirement is met.
- ☐ Entrance steps must be capable of being either locked, secured or removed to prevent access or surrounded by a barrier.
- ☐ Items 5 & 6 above must be completed.

Note: There are specific requirements for pool gate construction and it is the Permit Holders' responsibility to obtain this information to avoid re-inspection fees. Information on pool door alarms or pool gate construction can be obtained either on line or from our office.

By signing below I acknowledge that I am awa	re of the pool safety requirements listed above.
Property Owner	<u>Date</u>

Temporary Pool Barriers

During the installation or construction of a swimming pool, the pool must be ENTIRELY enclosed by a temporary barrier. The temporary barrier may be a temporary fence, a permanent fence, the wall of a permanent structure, any other structure, or any combination of those. However, the temporary barrier must:

- be at least four (4) feet high
- prevent access to the swimming pool by any person not installing or constructing the pool
- remain in place until a permanent pool barrier is provided
- be replaced by a permanent pool barrier within either:
 - 90 days of the date of issuance of the building permit for the installation or construction of the swimming pool; or
 - o 90 days of the date of commencement of the installation or construction of the swimming pool.


The code enforcement official may extend the time period to complete the permanent barrier for good cause, including, but not limited to, adverse weather conditions delaying construction.

There are some exceptions to the requirement for temporary pool barriers:

- Above-ground or on-ground pools where the pool structure itself serves as the barrier
- Spas or hot tubs with a safety cover, as long as the safety cover remains in place during the installation or construction
 - The safety cover can be removed temporarily for the installation or construction of the hot tub or spa if at least one person engaged in the installation or construction is present

Fences with horizontal rails more than 45"aparts


Where the barrier is composed of horizontal and vertical members and the distance between the tops of the horizontal members is 45 inches or more, spacing between vertical members shall not exceed 4 inches. Decorative cutouts shall not exceed 1-3/4 inches in width.



If horizontal rails are more than 45" apart the vertical spaces cannot be more than 4" apart

Chain link Fence Mesh Size Limit


Maximum mesh size for chain link fences shall be a 1 ¼-inch square unless the fence is provided with slats fastened at the top or the bottom which reduce the openings to not more than 1 ¾-inches. (Figure 3)



Important: The maximum mesh size for a pool fence is smaller than the standard chain link mesh


Gate Swing

Gates shall comply with the requirements of a fence for height, picket spacing or chain link mess size and shall be equipped to accommodate a locking device. Pedestrian access gates shall open <u>outwards</u> away from the pool and shall be <u>self-closing</u> and have a <u>self-latching</u> device. Gates must swing out only so that even if the gate is not completely latched, a young child pushing on the gate in order to enter the pool area will at least close the gate and may actually engage the latch.

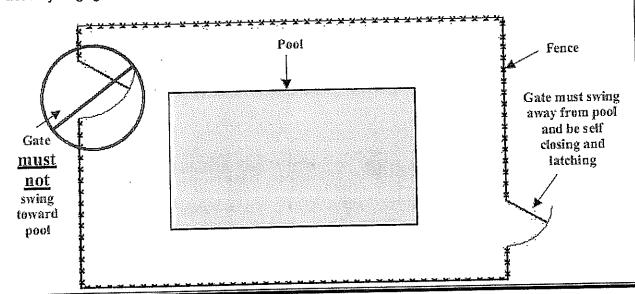

48" high gates with latches mounted less than 54" from the ground


If the latch is mounted less than 54" from grade, it must be mounted on the <u>pool</u> side of the gate, a minimum of 3" down from the top of the gate so you must reach over the fence to unlatch and have no space greater than $\frac{1}{2}$ " within 18" of the latch so a child can not reach through the fence to unlatch it.

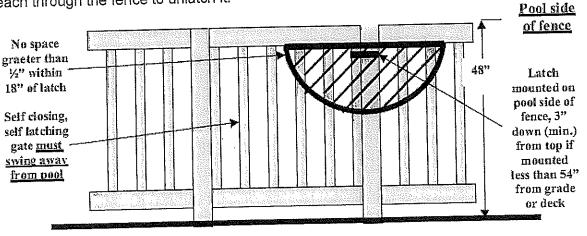

48" high gates with the latch mounted above the top of the gate.


Several manufactures make latches that can be mounted on a 48" high gate and have the operating mechanism above the top of the gate. The operating mechanism must be mounted at least <u>54</u>" above the bottom of the gate.







Gates more than 48" high

Gates that are more than 48" high must have the latch mounted at least 54" above the bottom of the gate.

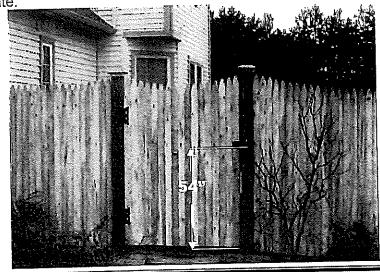

Above Ground Pool Ladders







Ladder can be raised
And locked


Enclosed by Protective Structure

Removable

Ladder requirements for above ground Pools.

Where an above ground pool structure (48" high Pool wall all the way around) is used as a barrier or where the barrier is mounted on top of the pool structure, and the means of access is a ladder or steps:

- 1. The ladder or steps shall be capable of being secured, locked or removed to prevent access; or
- The ladder or steps shall be surrounded by a barrier which meets the requirements of the code. When either the ladder or stairs are locked, secured or removed, any opening created shall not allow the passage of a 4 inch diameter sphere.

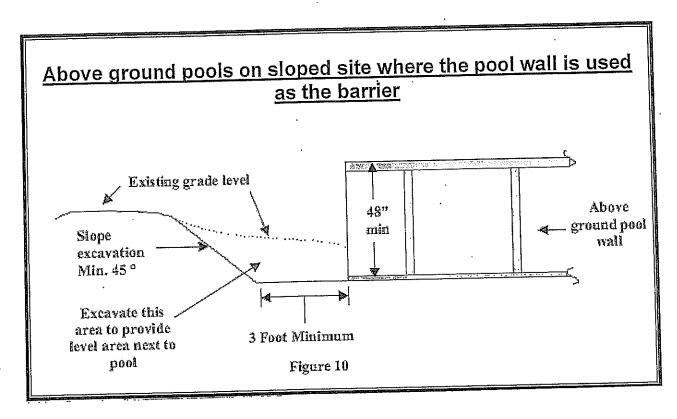

Direct Access to Pool from House

Where the wall of a dwelling serves as part of the barrier, one of the following conditions shall be met:

- 1. The pool shall be equipped with a powered safety cover in compliance with ASTM F 1346; or
- 2. Doors with direct access to the pool through that wall shall be equipped with an alarm which produces an audible alarm warning when the door and/or screen, if present, are opened. The alarm shall be listed and labeled in accordance with UL 2017. (**Note*** Door sounders from a security system do not meet the requirements of UL 2017. Deactivation switches shall be located at least 54 inches above the threshold of the door; or
- 3. Other means of protection, such as self-closing doors with self-latching devices which are approved by the governing body, shall be acceptable so long as the degree of protection afforded is not less than the protection afforded above.



PUBLIC CHAPTER NO. 850

SENATE BILL NO. 3019

By Burks, Marrero, Henry, Ford, Haynes, Barnes, Berke, Jackson, Herron, Finney, Kyle, Stewart, Tate, Harper

Substituted for: House Bill No. 3156

By Curtiss, Moore, Hardaway, Cooper, Gilmore

AN ACT to amend Tennessee Code Annotated, Title 47 and Title 68, Chapter 14, relative to swimming pools.

BE IT ENACTED BY THE GENERAL ASSEMBLY OF THE STATE OF TENNESSEE:

SECTION 1. Tennessee Code Annotated, Title 68, Chapter 14, is amended by adding the following as a new part thereto:

§ 68-14-801. This part shall be known and may be cited as "Katie Beth's Law".

§ 68-14-802. For purposes of this part, unless the context otherwise requires:

- (1) "Pool alarm" means a device which emits a sound of at least fifty (50) decibels when a person or an object weighing fifteen (15) pounds or more enters the water in a swimming pool, but shall not include, swimming protection alarm devices designed for individual use, such as an alarm attached to a child that sounds when the child exceeds a certain distance or becomes submerged in water;
- (2) "Residential dwelling" means a one-family or two-family dwelling structure; and
- (3) "Swimming pool" means any structure that is intended for swimming or recreational bathing and contains water over thirty-six inches (36") deep, including, but not limited to, in-ground, aboveground, and on-ground swimming pools; hot tubs; and nonportable spas.
- § 68-14-803. Each person, enterprise, agency or entity that sells swimming pools to the general public shall post in a prominent place a sign, at least six inches (6") high and fourteen inches (14") wide, that reads as follows:

STATE LAW REQUIRES A POOL ALARM BE INSTALLED.

§ 68-14-804. Each person, enterprise, agency or entity that purchases or acquires a swimming pool to be installed after the effective date of this act shall install a pool alarm before using or making available for use such swimming pool.

PLOT PLAN DIAGRAM

	REAR LOT LINE	
	·	
	•	
S		S I
l D		D
E		E
		L
O .		0
Ť		Т
•		L
L I		i
N		N E
E		E.
	PRONT LOT LINE	
	FRONT LOT LINE	
ZONING IN	SPECTOR:	
REMARKS:		
		
BUILDING I	NSPECTOR:PERMIT:	
REMARKS:		_
		_

NEED TO SHOW ALL WATER LINE, POWER LINES, GAS LINES AND SEWER LOCATION.

NOTE: All Residential districts; detached garages and/or accessory buildings must be located to the rear of the principle dwelling/structure (Ordinance 5.051.1(8)3, 5.051.2(8)3, 5.051.3 (8)2, 5.051.4 (8)4, 5.051.5 (8)7)